



RAYRHYTHMS




COMMERCIAL LED LIGHT

तमसो मा ज्योतिर्गमया
“ From Darkness to Light ”



ZENOBIA PENAL LIGHT

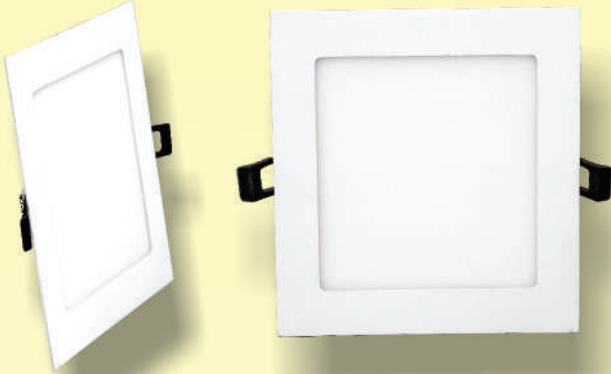

APPLICATION

Offices and conferences rooms
Homes, Hotels and work table
Showrooms and shopping malls

FEATURE

LM 80 APPROVED LED
HIGH CRI > 80 RA
CCT COLOR AVAILABLE
3000K/4000K/6500K
HIGH POWER FACTOR



Model No	ZSPL3R	ZSPL3S	ZSPL6R	ZSPL6S	ZSPL12R	ZSPL12S	ZSPL18R	ZSPL18L
Power Consumption	3 Watt	3 Watt	6 Watt	6 Watt	12 Watt	12 Watt	18 Watt	18 Watt
Shape	Round	Square	Round	Square	Round	Square	Round	Square
Outer Diameter	80 mm	80X80 mm	120 mm	120X120 mm	170 mm	170X170 mm	225 mm	225X225 mm
Cutout Diameter	65 mm	65X65 mm	105 mm	105X105 mm	150 mm	150x150 mm	200 mm	200X200 mm
Lumens Output	>300 lm	>300 lm	>600 lm	>600 lm	>1200 lm	>1200 lm	>1800 lm	>1800 lm

DIE CASTED ALUMINUM HEATSINK

Power Factor 0.9 +

SHORT CIRCUIT PROOF

OVER VOLTAGE PROTECTION

2 kVA SURGE PROTECTION

CONSISTENT CCT

CRI 80 RA



GANICUS DOWN LIGHT



APPLICATION

Offices and conferences rooms
Homes, Hotels and work table
Showrooms and shopping malls

FEATURE

LM 80 APPROVED LED
HIGH CRI > 80 RA
CCT COLOR AVAILABLE
3000K/4000K/6500K
HIGH POWER FACTOR



Model No	GSDL6R	GSDL6S	GSDL12R	GSDL12S	GSDL18R	GSDL18S	GSDL22R	GSDL22L
Power Consumption	6 Watt	6 Watt	12 Watt	12 Watt	18 Watt	18 Watt	22 Watt	22 Watt
Shape	Round	Square	Round	Square	Round	Square	Round	Square
Outer Diameter	90 mm	90X90 mm	120 mm	120X120 mm	160 mm	160X160 mm	170 mm	170X170 mm
Cutout Diameter	75 mm	75X75 mm	105 mm	105X105 mm	145 mm	145X145 mm	155 mm	155X155 mm
Lumens Output	>6000 lm	>600 lm	>1200 lm	>1200 lm	>1800 lm	>1800 lm	2200 lm	2200 lm

- Power Factor 0.9 +
- SHORT CIRCUIT PROOF
- OVER VOLTAGE PROTECTION
- 2 kVA SURGE PROTECTION
- CONSISTENT CCT
- CRI 80 RA



MAXIMUS SURFACE LIGHT



APPLICATION

Factory office, Building
Homes, Hotels and Temple
Corridors and Galleries
Parking Area

FEATURE

LM 80 APPROVED LED
HIGH CRI > 80
CCT COLOR AVAILABLE
3000K/4000K/6500K
HIGH POWER FACTOR



Model No	MSSL6R	MSSL6S	MSSL12R	MSSL12S	MSSL18R	MSSL18S
Power Consumption	6 Watt	6 Watt	12 Watt	12 Watt	18 Watt	18 Watt
Shape	Round	Square	Round	Square	Round	Square
Outer Diameter	120 mm	120X120 mm	170 mm	170X170 mm	225 mm	225X225 mm
Lumens Output	>600 lm	>600 lm	>1200 lm	>1200 lm	>1800 lm	>1800 lm

DIE CASTED
ALUMINUM
HEATSINK

Power
Factor 0.9 +

SHORT
CIRCUIT
PROOF

OVER
VOLTAGE
PROTECTION

2 kVA
SURGE
PROTECTION

CONSISTENT
CCT

CRI
80 RA



ALTIMUS TUBE LIGHT



APPLICATION

Homes , Hotels , Restaurants
Wash area, Study table
Showrooms and shopping malls
Parking Area, Corridors


FEATURE

LM 80 APPROVED LED
HIGH POWER FACTOR DRIVER
HIGH CRI > 80
CCT COLOR AVAILABLE
3000K/4000K/6500K
RED/GREEN/BLUE/PINK COLOR OPTIONAL

PC MODEL

Model No	ASPTL5	ASPTL10	ASPTL22
Power Consumption	5 Watt	10 Watt	22 Watt
Outer Diameter	290 mm	580 mm	1170 mm
Lumens Output	>500 lm	>1000 lm	>2200 lm

AURELIUS TUBE LIGHT



ALUMINIUM MODEL

Model No	ASATL24	ASATL30	ASATL40
Power Consumption	24 Watt	30 Watt	40 Watt
Outer Diameter	1170 mm	1170 mm	1170 mm
Lumens Output	>2400 lm	> 3000 lm	> 4000 lm

Power Factor 0.9 +

SHORT CIRCUIT PROOF

OVER VOLTAGE PROTECTION

2 kVA SURGE PROTECTION

CONSISTENT CCT

CRI 80 RA



MAGNUS FLOOD LIGHT




APPLICATION

Industries
 Factory Area
 Hoarding Lighting
 Display Boards
 Temple , Landscape Area Luminaries
 Replacement Helogen, MHL , Mercury Light

FEATURE

Aluminium Die-Cast Heatsink
 LM 80 APPROVED LED
 HIGH CRI > 70
 CCT COLOR AVAILABLE
 3000K/6500K
 HIGH POWER FACTOR



Model No	MSFL36	MSFL60	MSFL100	MSFL150	MSFL200
Power Consumption	36 Watt	60 Watt	100 Watt	150 Watt	200 Watt
Lumens Output	>3600 lm	>6000 lm	>10000 lm	>15000 lm	>20000 lm
Size in MM	160X195	193X235	235X280	270X340	350X410
Beam Angel	120 Degree				

DIE CASTED
 ALUMINUM
 HEATSINK

Power
 Factor 0.9 +

SHORT
 CIRCUIT
 PROOF

OVER
 VOLTAGE
 PROTECTION

2 kVA
 SURGE
 PROTECTION

CONSISTENT
 CCT

CRI
 80 RA



SUNRAY STREET LIGHT



APPLICATION

Factory Area
 Society Streets , Village Streets
 Landscape Area Luminaries
 Outdoor Lighting
 Pole Size ≤ 35 mm ; ≤ 60 mm

FEATURE

Aluminium Die-Cast Heatsink
 LM 80 APPROVED LED
 HIGH CRI > 70
 CCT COLOR AVAILABLE
 3000K/5700K/6500K
 HIGH POWER FACTOR

Automation Supportive
Auto On/off with Lux
measurements
DC Street Light Also Available
Solar/ Invertor Supportive

Model No	SSSL18	SSSL24	SSSL30	SSSL36	SSSL48	SSSL60	SSSL90	SSSL120
Power Consumption	18 Watt	24 Watt	30 Watt	36 Watt	48 Watt	60 Watt	90 Watt	120 Watt
Lumens Output	>1800 lm	>2400 lm	>3000 lm	>3600 lm	>4800 lm	>6000 lm	>9000 lm	>12000 lm
Pipe Diameter	42 mm	42 mm	42 mm	42 mm	42 mm	42 mm	54 mm	54 mm
Size in MM	110X335	110X335	160X360	160X360	160X360	200X425	200X425	252X500

- DIE CASTED ALUMINUM HEATSINK
- Power Factor 0.9 +
- SHORT CIRCUIT PROOF
- OVER VOLTAGE PROTECTION
- 2 kVA SURGE PROTECTION
- CONSISTENT CCT
- CRI 80 RA



RAYRHYTHMS



RAYRHYTHMS Industries Private Limited

FRO
102, Saket complex
Near Urmi Char Rasta
Akota, 390007
Vadodara, Gujarat, India

Factory
48, Kanha Industrial Estate
Opp. Adroit Pharmachem co./Atta Mill
Manjusar Savli Road, Manjusar - 371775
Vadodara , Gujarat, India

www.rayrhythms.com
info@rayrhythms.com
customer care: 8156083200

E-commerce Partner:
www.shopled365.com

MANUFACTURER AND SUPPLIER OF LED LIGHTS PRODUCTS

DOMESTIC AND COMMERCIAL LIGHT

INDUSTRIAL LIGHTS

SPECIAL PURPOSE LIGHTS