



RAYRHYTHMS



Industrial Light


www.rayrhythms.com

ତାଳାଝର ଲା ଜ୍ଵାଳିତାଲୟା

“ From Darkness to Light ”



PULSE DOWN LIGHT

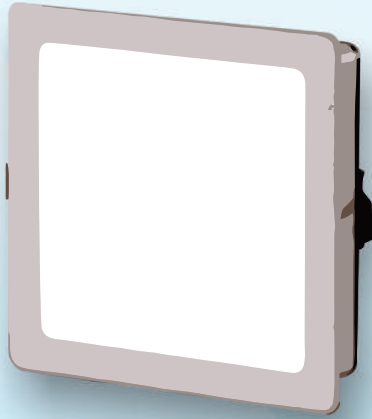

APPLICATION

Offices and conferences rooms
Dinning area, Dispatch area
Work table
Many other Recess Mount Application



FEATURE

LM 80 APPROVED LED
HIGH CRI > 80 RA
CCT COLOR AVAILABLE
3000K/4000K/6500K
HIGH POWER FACTOR
Aluminum Heatsink

Other available body color



Model No	PSDL7R	PSDL7S	PSDL12R	PSDL12S	PSDL15R	PSDL15S	PSDL18R	PSDL18S	PSDL22R	PSDL22S
Power Consumption	7 Watt	7 Watt	12 Watt	12 Watt	15 Watt	15 Watt	18 Watt	18 Watt	22 Watt	22 Watt
Shape	Round	Square	Round	Square	Round	Square	Round	Square	Round	Square
Outer Diameter	80 mm	80X80 mm	120 mm	120X120 mm	120 mm	120X120 mm	160 mm	160X160 mm	160 mm	160X160 mm
Cutout Diameter	68 mm	68X68 mm	108 mm	108X108 mm	108 mm	108x108 mm	148 mm	148X148 mm	148 mm	148X148 mm
Lumen Output	>700 lm	>700 lm	>1200 lm	>1200 lm	>1500 lm	>1500 lm	>1800 lm	>1800 lm	>2200 lm	>2200 lm

DIE CASTED ALUMINUM HEATSINK

Power Factor 0.9 +

SHORT CIRCUIT PROOF

OVER VOLTAGE PROTECTION

2 kVA SURGE PROTECTION

CONSISTENT CCT

CRI 80 RA



LEAP LINEAR LIGHT



APPLICATION

Lobby, Parking Area
Dinning area, dispatch area
Many more Wider Surface Mount Application





FEATURE

- LM 80 APPROVED LED
- HIGH CRI > 80 RA
- CCT COLOR AVAILABLE
- MONOCHROMATIC LED
- 1800K/2000K/2200K/2700K
- 3000K/4000K/6500K
- DUAL CCT AVAILABLE
- HIGH POWER FACTOR
- Aluminum Heatsink



Model No	LTL-T5		LTL-T8-Retrofit	LTL-Surface		LTL-WP-Surface
Power Consumption	9 Watt	18 Watt	22 Watt	36 Watt	44 Watt	44 Watt
Outer Diameter	580 MM	1170 MM	1200 MM	1200 MM	1200 MM	1200 MM
Lumen Output	900 LM	1800 LM	2200 LM	3600 LM	4400 LM	4400 LM






ELITE LINEAR LIGHT




APPLICATION

2x2 Light CFL Conversion to LED
Work table
Inspection Room
Machine Lights

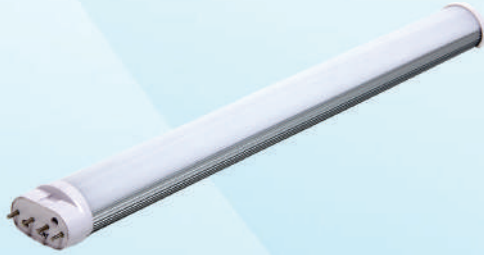

FEATURE

LM 80 APPROVED LED
HIGH CRI > 80 RA
CCT COLOR AVAILABLE
MONOCHROMATIC LED
2200K/2700K
3000K/4000K/6500K
DUAL CCT AVAILABLE
HIGH POWER FACTOR

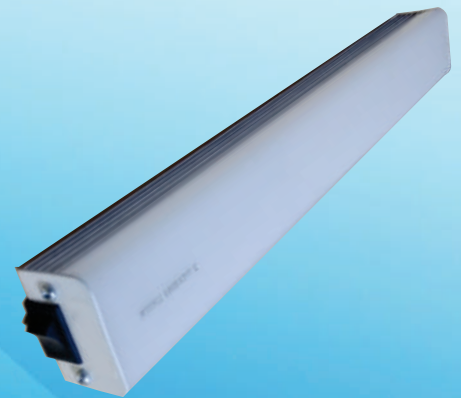

Model No	EL2G-11	ELInspect		ELLiner	
Power Consumption	16 Watt	10 Watt	20 Watt	44 Watt	60 Watt
Outer Diameter	420 MM	150 MM	250 MM	1200 MM	1500 MM
Lumen Output	1600 LM	1000 LM	3000 LM	4400 LM	6000 LM





RAYRHYTHMS

MAGNUS FLOOD LIGHT



APPLICATION

Industries
 Factory Area
 Hoarding Lighting
 Display Boards
 Temple , Landscape Area Luminaries
 Replacement Helogen, MHL , Mercury Light

FEATURE

Aluminium Die-Cast Heatsink
 LM 80 APPROVED LED
 HIGH CRI > 70
 CCT COLOR AVAILABLE
 3000K/6500K
 HIGH POWER FACTOR
 10 / 20 kVA SURGE PROTECTION AVAILABLE



Model No	MSFL30	MSFL50	MSFL100	MSFL150	MSFL200	MSFL300	MSFL400
Power Consumption	30 Watt	50 Watt	100 Watt	150 Watt	200 Watt	300 Watt	400 Watt
Lumens Output	>3000 lm	>5000 lm	>10000 lm	>15000 lm	>20000 lm	>30000 lm	>40000 lm
Size in MM	160X195	193X235	235X280	270X340	350X410		
Beam Angel	120 Degree						

CRI
70 RA

IP - 65

Tempered
glass

440 VAC
PROTECTION

Available in
Lens model
also

ALUMINUM
HEATSINK

Power
Factor 0.9 +

SHORT
CIRCUIT
PROOF

OVER
VOLTAGE
PROTECTION

10/20 KVA
SURGE
PROTECTION



RAYRHYTHMS

SUNRAY STREET LIGHT



APPLICATION

Factory Area
Society Streets , Village Streets
Landscape Area Luminaries
Outdoor Lighting

FEATURE

Aluminium Die-Cast Heatsink
LM 80 APPROVED LED
HIGH CRI > 70
CCT COLOR AVAILABLE
3000K/5700K/6500K
HIGH POWER FACTOR
10 / 20 kVA SURGE PROTECTION AVAILABLE

Automation Supportive
Auto On/off with Lux
measurements
DC Street Light Also Available
Solar/ Invertor Supportive

Model No	SSSL18	SSSL24	SSSL30	SSSL36	SSSL48	SSSL60	SSSL90	SSSL120
Power Consumption	18 Watt	24 Watt	30 Watt	36 Watt	48 Watt	60 Watt	90 Watt	120 Watt
Lumens Output	>1800 lm	>2400 lm	>3000 lm	>3600 lm	>4800 lm	>6000 lm	>9000 lm	>12000 lm
Pipe Diameter	42 mm	42 mm	42 mm	42 mm	42 mm	42 mm	54 mm	54 mm
Size in MM	110X335	110X335	160X360	160X360	160X360	200X425	200X425	252X500

CRI
70 RA

IP - 65

Tempered
glass

440 VAC
PROTECTION

Available in
Lens model
also

ALUMINUM
HEATSINK

Power
Factor 0.9 +

SHORT
CIRCUIT
PROOF


OVER
VOLTAGE
PROTECTION

10/20 KVA
SURGE
PROTECTION



RAYRHYTHMS

CREDESCENCE HIGHBAY LIGHT

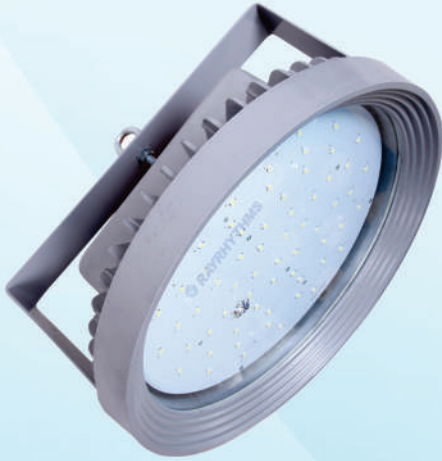

APPLICATION

Chemical & Pharmaceuticals Factories
 Engineering Work space
 Food Factories
 Railway Platform
 Aerodrome

FEATURE

Aluminium Die-Cast Housing
 LM 80 APPROVED LED
 HIGH POWER LED
 HIGH CRI > 70
 CCT COLOR AVAILABLE
 3000K/5700K/6500K
 HIGH POWER FACTOR



Model No	CHL45	CHL90	CHL150	CHL200
Power Consumption	45 Watt	90 Watt	150 Watt	200 Watt
Lumens Output	4950 lm	>9900 lm	>16500 lm	>22000 lm
Dimensions	180 MM	205 MM	375 MM	375 MM

CRI
70 RA

IP - 65

Tempered
glass

440 VAC
PROTECTION

Available in
Lens model
also

ALUMINUM
HEATSINK

Power
Factor 0.9 +


SHORT
CIRCUIT
PROOF

OVER
VOLTAGE
PROTECTION

10/20 KVA
SURGE
PROTECTION



LED CLEAN ROOM LIGHT

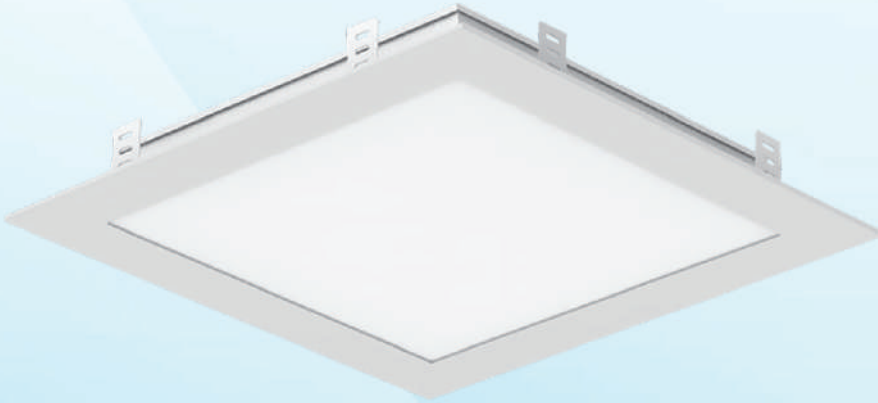


APPLICATION

Clean Room Top Opening Luminaires
 Laboratory Light
 Test Room, Quality Assurance Room
 Hygienic Facilities
 Food and Pharmaceutical Companies

Technical Drawing


FEATURE

CRCA Sheet Metal Housing
 PUF Panel High Adjustment
 IP65 From Front side
 LM 80 APPROVED LED
 HIGH CRI > 80
 CCT COLOR AVAILABLE
 Monochromatic/3000K/5700K/6500K
 Single CCT & DUAL CCT in one fixture available
 HIGH POWER FACTOR

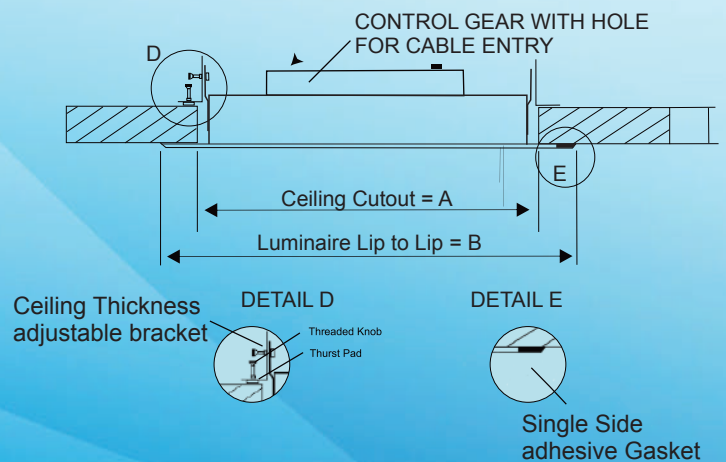

Top frame with top cover to be order separately

Model No	CLTO24	CLTO30	CLTO45	CLTO60
Power Consumption	24 Watt	30 Watt	45 Watt	60 Watt
Lumens Output	>2400 lm	>3000 lm	>4500 lm	>6000 lm
Dimensions	A : 300 X 300 MM B : 340 X 340 MM	A : 300 X 300 MM B : 340 X 340 MM	A : 600 x 600 MM B : 640 x 640 MM	A : 600 x 600 MM B : 640 x 640 MM





LED CLEAN ROOM LIGHT





APPLICATION

Clean Room Bottom Opening Luminaries
 Laboratory Light
 Test Room, Quality Assurance Room
 Hygienic Facilities
 Food and Pharmaceutical Companies


FEATURE

CRCA Sheet Metal Housing
 PUF Panel High Adjustment
 IP65 From Front side
 LM 80 APPROVED LED
 HIGH CRI > 80
 CCT COLOR AVAILABLE
 Monochromatic/3000K/5700K/6500K
 Single CCT & DUAL CCT in one fixture available
 HIGH POWER FACTOR

Technical Drawing

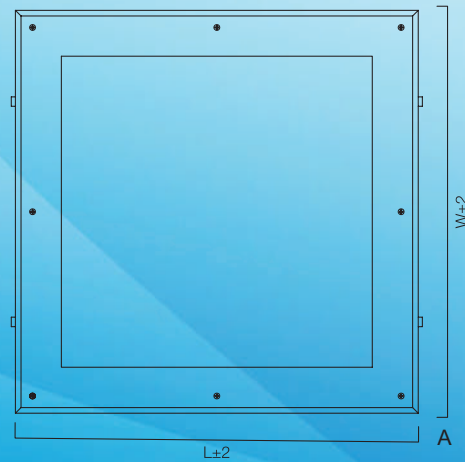

Model No	CLTO24	CLTO30	CLTO45	CLTO60
Power Consumption	24 Watt	30 Watt	45 Watt	60 Watt
Lumens Output	>2400 lm	>3000 lm	>4500 lm	>6000 lm
Dimensions	A : 300 X 300 MM B : 270 X 270 MM	A : 300 X 300 MM B : 270 X 270 MM	A : 600 x 600 MM B : 570 x 570 MM	A : 600 x 600 MM B : 570 x 570 MM





RAYRHYTHMS

MANUFACTURER AND SUPPLIER
OF LED LIGHTS PRODUCTS

SPECIALIST IN PHARMACEUTICALS
AND CHEMICAL PLANTS

INDUSTRIAL LIGHT
SPECIAL PURPOSE LIGHTS
DOMESTIC LIGHT
COMMERCIAL LIGHT



E-commerce Partner:
www.shopled365.com



RAYRHYTHMS Industries Private Limited

Factory

48, Kanha Industrial Estate

Opp. Adroit Pharmachem co./Atta Mill

Manjusar Savli Road, Manjusar - 371775

Vadodara , Gujarat, India

FRO

102, Saket complex

Near Urmi Char Rasta

Akota, 390007

Vadodara, Gujarat, India

www.rayrhythms.com
info@rayrhythms.com
customer care: 8156083200